

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 November 2002 (07.11.2002)


PCT

(10) International Publication Number
WO 02/089234 A1

- (51) International Patent Classification⁷: **H01M 4/50**, 4/48, 10/40
- (21) International Application Number: PCT/US02/07251
- (22) International Filing Date: 11 March 2002 (11.03.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/845,178 27 April 2001 (27.04.2001) US
- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (72) Inventors: **LU, Zhonghua**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **DAHNN, Jeffrey, R.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (74) Agents: **WEISS, Lucy, C.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: IMPROVED CATHODE COMPOSITIONS FOR LITHIUM-ION BATTERIES

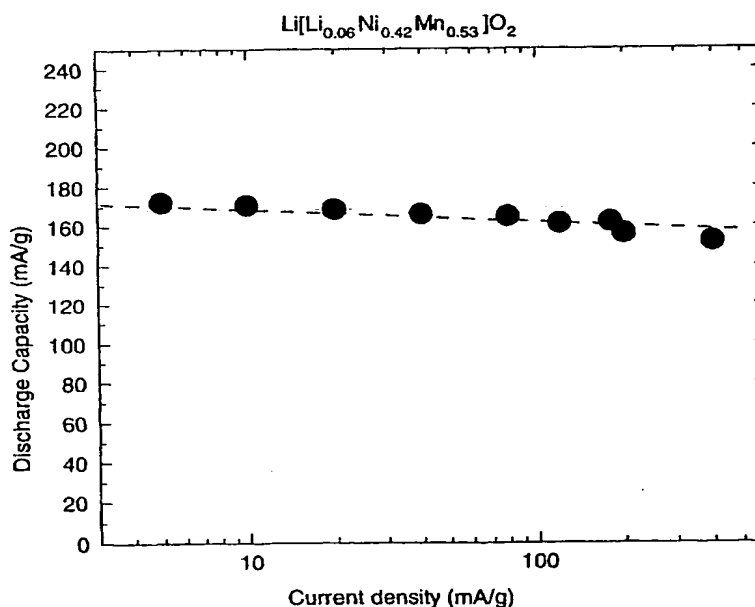

(57) Abstract: A cathode composition for a lithium-ion battery having the formula $\text{Li}[\text{M}_{1(1-x)}^{191}\text{Mn}_x^{191}]\text{O}_2^{191}$ where $0 < x < 1$ and M_1 represents one or more metal elements, with the proviso that M_1 is a metal element other than chromium. The composition is in the form of a single phase having an O3 crystal structure that does not undergo a phase transformation to a spinel crystal structure when incorporated in a lithium-ion battery and cycled for 100 full charge-discharge cycles at 30°C and a final capacity of 130 mAh/g using a discharge current of 30 mA/g.

WO 02/089234 A1

WO 02/089234 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

IMPROVED CATHODE COMPOSITIONS FOR LITHIUM-ION BATTERIES

TECHNICAL FIELD

5 This invention relates to preparing compositions useful as cathodes for lithium-ion batteries.

BACKGROUND

Lithium-ion batteries typically include an anode, an electrolyte, and a cathode that contains lithium in the form of a lithium-transition metal oxide. Examples of transition
10 metal oxides that have been used include cobalt dioxide, nickel dioxide, and manganese dioxide. None of these materials, however, exhibits an optimal combination of high initial capacity, high thermal stability, and good capacity retention after repeated charge-discharge cycling.

SUMMARY

15 In general, the invention features a cathode composition for a lithium-ion battery having the formula $\text{Li}[\text{M}^{1}_{(1-x)}\text{Mn}_x]\text{O}_2$ where $0 < x < 1$ and M^1 represents one or more metal elements, with the proviso that M^1 is a metal element other than chromium. The composition is in the form of a single phase having an O3 crystal structure that does not undergo a phase transformation to a spinel crystal structure when incorporated in a
20 lithium-ion battery and cycled for 100 full charge-discharge cycles at 30°C and a final capacity of 130 mAh/g using a discharge current of 30 mA/g. The invention also features lithium-ion batteries incorporating these cathode compositions in combination with an anode and an electrolyte.

In one embodiment, $x = (2-y)/3$ and $\text{M}^{1}_{(1-x)}$ has the formula $\text{Li}_{(1-2y)/3}\text{M}^2_y$, where
25 $0 < y < 0.5$ (preferably $0.083 < y < 0.5$, and more preferably $0.167 < y < 0.5$) and M^2 represents one or more metal elements, with the proviso that M^2 is a metal element other than chromium. The resulting cathode composition has the formula $\text{Li}[\text{Li}_{(1-2y)/3}\text{M}^2_y\text{Mn}_{(2-y)/3}]\text{O}_2$.

In a second embodiment, $x = (2-2y)/3$ and $\text{M}^{1}_{(1-x)}$ has the formula $\text{Li}_{(1-y)/3}\text{M}^3_y$,
30 where $0 < y < 0.5$ (preferably $0.083 < y < 0.5$, and more preferably $0.167 < y < 0.5$) and M^3 represents one or more metal elements, with the proviso that M^3 is a metal element other than chromium. The resulting cathode composition has the formula $\text{Li}[\text{Li}_{(1-y)/3}\text{M}^3_y\text{Mn}_{(2-2y)/3}]\text{O}_2$.

In a third embodiment, $x = y$ and $M^1_{(1-x)}$ has the formula $M^4_y M^5_{1-2y}$, where $0 < y < 0.5$ (preferably $0.083 < y < 0.5$, and more preferably $0.167 < y < 0.5$), M^4 is a metal element other than chromium, and M^5 is a metal element other than chromium and different from M^4 . The resulting cathode composition has the formula $Li[M^4_y M^5_{1-2y} Mn_y]O_2$.

5 The invention provides cathode compositions, and lithium-ion batteries incorporating these compositions, that exhibit high initial capacities and good capacity retention after repeated charge-discharge cycling. In addition, the cathode compositions do not evolve substantial amounts of heat during elevated temperature abuse, thereby improving battery safety.

10 The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

15 FIG. 1 is an exploded perspective view of an electrochemical cell used to test various electrode compositions.

FIGS. 2(a)-(e) are plots of voltage versus capacity and capacity versus cycle number for the samples described in Examples 1 and 3-6 cycled between 4.4 V and 3.0 V.

20 FIGS. 3(a)-(e) are plots of voltage versus capacity and capacity versus cycle number for the samples described in Examples 1 and 3-6 cycled between 4.8 V and 2.0 V.

FIGS. 4(a)-(d) are x-ray diffraction patterns for the samples described in Examples 3 and 7-9.

FIGS. 5(a)-(d) are x-ray diffraction patterns for the samples described in Examples 5 and 10-12.

25 FIGS. 6(a)-(d) are x-ray diffraction patterns for the samples described in Examples 6 and 16-18.

FIGS. 7(a)-(d) are plots of voltage versus capacity and capacity versus cycle number for the samples described in Examples 6 and 16-18 cycled between 4.4 V and 3.0 V.

30 FIGS. 8(a)-(d) are plots of voltage versus capacity and capacity versus cycle number for the samples described in Examples 6 and 16-18 cycled between 4.8 V and 2.0 V.

FIGS. 9(a)-(b) are plots of voltage versus capacity for the samples described in Examples 19 and 20.

FIG. 10 is a plot of capacity versus cycle number for the sample described in Example 19 cycled between 4.4V and 2.5 V.

Fig. 11 is a plot of capacity versus cycle number for the sample described in Example 20 cycled between 4.4 V and 2.5 V.

5 Fig. 12 is a plot of capacity versus cycle number for the sample described in Example 1 cycled between 4.4 V and 3.0 V at both 30°C and 55°C.



Fig. 13 is a plot of capacity versus discharge current density for the sample described in Example 1 measured at 30°C to a 2.5 V cutoff.

DETAILED DESCRIPTION

10 Cathode compositions have the formulae set forth in the Summary of the Invention, above. The formulae themselves, as well as the choice of particular metal elements, and combinations thereof, for $M^1 - M^5$, reflect certain criteria that the inventors have discovered are useful for maximizing cathode performance. First, the cathode compositions preferably adopt an O3 crystal structure featuring layers generally arranged
15 in the sequence lithium-oxygen-metal-oxygen-lithium. This crystal structure is retained when the cathode composition is incorporated in a lithium-ion battery and cycled for 100 full charge-discharge cycles at 30°C and a final capacity of 130 mAh/g using a discharge current of 30 mA/g, rather than transforming into a spinel-type crystal structure under these conditions. In addition, to maximize rapid diffusion in the lithium layers, and thus
20 battery performance, it is preferred to minimize the presence of metal elements in the lithium layers. It is further preferred that at least one of the metal elements be oxidizable within the electrochemical window of the electrolyte incorporated in the battery.

The cathode compositions may be synthesized by jet milling or by combining precursors of the metal elements (e.g., hydroxides, nitrates, and the like), followed by
25 heating to generate the cathode composition. Heating is preferably conducted in air at temperatures of at least about 600°C, more preferably at least 800°C. In general, higher temperatures are preferred because they lead to materials with increased crystallinity. The ability to conduct the heating process in air is desirable because it obviates the need and associated expense of maintaining an inert atmosphere. Accordingly, the particular metal
30 elements are selected such that they exhibit appropriate oxidation states in air at the

desired synthesis temperature. Conversely, the synthesis temperature may be adjusted so that a particular metal element exists in a desired oxidation state in air at that temperature. In general, examples of suitable metal elements for inclusion in the cathode composition include Ni, Co, Fe, Cu, Li, Zn, V, and combinations thereof. Particularly preferred cathode compositions are those having the following formulae:



The cathode compositions are combined with an anode and an electrolyte to form a lithium-ion battery. Examples of suitable anodes include lithium metal, graphite, and lithium alloy compositions, e.g., of the type described in Turner, U.S. 6,203,944 entitled "Electrode for a Lithium Battery" and Turner, WO 00/03444 entitled "Electrode Material and Compositions." The electrolyte may be liquid or solid. Examples of solid electrolytes include polymeric electrolytes such as polyethylene oxide, polytetrafluoroethylene, fluorine-containing copolymers, and combinations thereof.

Examples of liquid electrolytes include ethylene carbonate, diethyl carbonate, propylene carbonate, and combinations thereof. The electrolyte is provided with a lithium electrolyte salt. Examples of suitable salts include LiPF_6 , LiBF_4 , and LiClO_4 . The invention will now be described further by way of the following examples.

EXAMPLES

Electrochemical Cell Preparation

Electrodes were prepared as follows. About 21 wt. % active cathode material (prepared as described below), 5.3 wt. % Kynar Flex 2801 (a vinylidene fluoride-hexafluoropropylene copolymer commercially available from Atochem), 8.4 wt. % dibutyl phthalate, 2.1 wt. % Super S carbon black (commercially available from MMM Carbon, Belgium), and 63.2 wt. % acetone were mechanically shaken for 1-2 hours in a mixing vial to which a zirconia bead (8 mm diameter) had been added to form a uniform slurry. The slurry was then spread in a thin layer (about 150 micrometers thick) on a glass plate using a notch-bar spreader. After evaporating the acetone, the resulting film was peeled from the glass and a circular electrode measuring 1.3 cm in diameter was punched from the film using an electrode punch, after which the electrode was soaked in diethyl ether for

about 10 minutes to remove dibutyl phthalate and to form pores in the electrode. The ether rinse was repeated two times. The electrodes were then dried at 90°C overnight. At the conclusion of the drying period, the circular electrode was weighed and the active mass (the total weight of the circular electrode multiplied by the fraction of the electrode weight made up of the active cathode material) determined. Typically, the electrodes contained 74% by weight active material. The electrodes were then taken into an argon-filled glove box where the electrochemical cell was constructed.

An exploded perspective view of the electrochemical cell 10 is shown in FIG. 1. A stainless steel cap 24 and special oxidation resistant case 26 contain the cell and serve as the negative and positive terminals respectively. The cathode 12 was the electrode prepared as described above. The anode 14 was a lithium foil having a thickness of 125 micrometers; the anode also functioned as a reference electrode. The cell featured 2325 coin-cell hardware, equipped with a spacer plate 18 (304 stainless steel) and a disc spring 16 (mild steel). The disc spring was selected so that a pressure of about 15 bar would be applied to each of the cell electrodes when the cell was crimped closed. The separator 20 was a Celgard #2502 microporous polypropylene film (Hoechst-Celanese), which had been wetted with a 1M solution of LiPF_6 dissolved in a 30:70 volume mixture of ethylene carbonate and diethyl carbonate (Mitsubishi Chemical). A gasket 27 was used as a seal and to separate the two terminals.

Elemental Analysis

Approximately 0.02 g of each sample was accurately weighed on a microbalance (to 1 μg) into a 50 mL glass class A volumetric flask. 2 mL hydrochloric acid and 1 mL nitric acid were then added to form a salt. Once the salt had dissolved, the solution was diluted to 50 mL with deionized water and the solution shaken to mix. This solution was diluted further 10 times. Next, a 5 mL aliquot was removed with a glass class A volumetric pipet and diluted to 50 mL in a glass class A volumetric flask with 4 % HCl and 2 % nitric acid.

The diluted solution were analyzed on a Jarrell-Ash 61E ICP using standards of 0, 1, 3, 10, and 20 ppm Co, Ni, Mn, Li, and Na in 4 % HCl / 2% HNO_3 . A 5 ppm standard of each element was used to monitor the stability of the calibration. All standards were prepared from a certified stock solution and with class A volumetric glassware. Prior to

analysis of the elements, the injector tube of the ICP was cleaned to remove any deposits. All element calibration curves exhibited r^2 values in excess of 0.9999.

The analytical results were measured in weight percent. These values were then converted to atomic percent and then ultimately to a stoichiometry where the oxygen content had been normalized to a stoichiometry of 2.

Examples 1-6

Example 1 describes the synthesis of 0.1 mole of $\text{Li}[\text{Li}_{(1-2y)/3}\text{Ni}_y\text{Mn}_{(2-y)/3}]\text{O}_2$ where $y = 0.416$.

12.223 g of $\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$ (Aldrich Chemical Co.) and 13.307 g of $\text{Mn}(\text{NO}_3)_2 \cdot 4\text{H}_2\text{O}$ (Aldrich Chemical Co.) were dissolved in 30 mls of distilled water to form a transition metal solution. In a separate beaker, 9.575 g of $\text{LiOH} \cdot \text{H}_2\text{O}$ (FMC Corp.) was dissolved in 200 mls of distilled water. While stirring, the transition metal solution was added dropwise using a buret to the lithium hydroxide solution over a period of about 3 hours. This caused the co-precipitation of a Ni-Mn hydroxide and the formation of LiNO_3 (dissolved). The precipitate was recovered by filtration and washed repeatedly using vacuum filtration. It was then placed in a box furnace set to 180°C to dry, after which it was mixed with 4.445 g $\text{LiOH} \cdot \text{H}_2\text{O}$ in an autogrinder and pressed into a number of pellets, each weighing two grams.

The pellets were heated in air at 480°C for 3 hours, after which they were quenched to room temperature, combined, and re-ground into powder. New pellets were pressed and heated in air to 900°C for 3 hours. At the conclusion of the heating step, the pellets were quenched to room temperature and again ground to powder to yield the cathode material.

Elemental analysis of the cathode material revealed that the composition had the following stoichiometry: $\text{Li}[\text{Li}_{0.06}\text{Ni}_{0.393}\text{Mn}_{0.51}]\text{O}_2$, which is in close agreement with the target stoichiometry of $\text{Li}[\text{Li}_{0.06}\text{Ni}_{0.42}\text{Mn}_{0.53}]\text{O}_2$.

Examples 2-6 were prepared in analogous fashion except that the relative amounts of reactants were adjusted to yield samples in which $y = 0.083$ (Example 2), 0.166 (Example 3), 0.25 (Example 4), 0.333 (Example 5), and 0.5 (Example 6). Elemental analysis of the cathode material from Example 5 revealed that the composition had the following stoichiometry: $\text{Li}[\text{Li}_{0.13}\text{Ni}_{0.314}\text{Mn}_{0.55}]\text{O}_2$, which is in close agreement with the target stoichiometry of $\text{Li}[\text{Li}_{0.11}\text{Ni}_{0.33}\text{Mn}_{0.56}]\text{O}_2$.

A powder x-ray diffraction pattern for each sample was collected using a Siemens D5000 diffractometer equipped with a copper target X-ray tube and a diffracted beam monochromator. Data was collected between scattering angles of 10 degrees and 130 degrees.

5 The crystal structure of each sample was determined based upon the x-ray diffraction data as described in (a) C. J. Howard and R. J. Hill, Australian Atomic Energy Commission Report No. M112 (1986); and (b) D. B. Wiles and R. A. Young, J. Appl. Cryst., 14:149-151 (1981). Lattice parameters were determined using the Rietveld
10 refinement. The lattice parameters for each sample are reported in Table 1. The crystal structure of each sample could be described well by the O3 crystal structure type. Electrochemical cells were constructed according to the above-described procedure using the material of Examples 1 and 3-6 as the cathode. Each cell was charged and discharged between 4.4 V and 3.0 V at 30°C using computer-controlled discharge stations from Moli Energy Ltd. (Maple Ridge, B.C., Canada) and a current of 10 mA/g of active material.
15 Fig. 3 is a plot of voltage versus capacity and capacity versus cycle number for each cell. Reversible and irreversible capacities were determined and are reported in Table 1. Each sample showed excellent reversibility and excellent capacity retention for at least 15 cycles.

20 A second set of electrochemical cells was constructed using the materials of Examples 1 and 3-6, and cycled as described above with the exception that the cells were charged and discharged between 4.8 V and 2.0 V using a current of 5 mA/g of active material. Fig. 3 is a plot of voltage versus capacity and capacity versus cycle number for each cell. Reversible and irreversible capacities were determined and are reported in Table 1. Each sample performed well. Examples 3 and 4 show large irreversible
25 capacities, but still give stable reversible capacities over 200 mAh/g. Samples 1, 5, and 6 show irreversible capacities less than 30 mAh/g and reversible capacities greater than 200 mAh/g. In particular, Example 1 shows an irreversible capacity of only about 15 mAh/g and a reversible capacity of about 230 mAh/g.

TABLE 1

Example	y	HTT (°C)	a (Å)	c (Å)	Rev. Capacity mAh/g 3.0-4.4V	Irrev. Capacity mAh/g 3.0-4.4V	Rev. Capacity mAh/g 2.0-4.8V	Irrev. Capacity mAh/g 2.0-4.8V
1	0.416	900	2.8793	14.2871	160	10	230	15
2	0.083	900	2.8499	14.2386	*	*	*	*
3	0.166	900	2.8589	14.2427	82	10	230	120
4	0.25	900	2.8673	14.258	117	12	250	50
5	0.333	900	2.8697	14.2654	142	10	240	25
6	0.5	900	2.8900	14.2971	140	10	200	25

5 “HTT” refers to the heat treatment temperature. “a” and “c” represent lattice parameters. An asterisk means “not tested.”

Another electrochemical cell was assembled using the material of Example 1 and cycled between 3.0 V and 4.4 V using a current of 30 mA/g. Some cycles were collected at 30°C, while other cycles were collected at 55°C. The results are reported in Fig. 12. The capacity of the material was maintained even at 55°C after extended cycling, demonstrating that the material did not exhibit phase separation after extended cycling.

Another electrochemical cell was assembled using the material of Example 1 and used to test the rate capability of the material. Data was collected at 30°C up to a 2.0 V cutoff. The results are shown in Fig. 13. The results demonstrate that the capacity of the material was maintained even up to discharge currents as large as 400 mA/g.

Examples 7-9

Examples 7-9 were prepared following the procedure described for Examples 1-6 where $y = 0.166$ except that the samples were heated at 600°C (Example 7), 700°C (Example 8), and 800°C (Example 9), rather than 900°C. X-ray diffraction patterns for each sample were collected and are shown in Fig. 3, along with an x-ray diffraction pattern for Example 3 prepared at 900°C. The lattice parameters were also determined and are set

forth in Table 2, along with the data for Example 3. The data demonstrate that as the heating temperature increases, the peak widths in the diffraction patterns become narrower, indicating increased crystallinity. All peaks can be understood based on the O3 crystal structure.

TABLE 2

Example	y	HTT (°C)	a (Å)	c (Å)
7	0.166	600	2.8653	14.1739
8	0.166	700	2.8614	14.2076
9	0.166	800	2.8597	14.2289
3	0.166	900	2.8589	14.2427

“HTT” refers to the heat treatment temperature. “a” and “c” represent lattice parameters.

Examples 10-12

Examples 10-12 were prepared following the procedure described for Examples 1-6 where $y = 0.333$ except that the samples were heated at 600°C (Example 10), 700°C (Example 11), and 800°C (Example 12), rather than 900°C. X-ray diffraction patterns for each sample were collected and are shown in Fig. 4, along with an x-ray diffraction pattern for Example 5 prepared at 900°C. The lattice parameters were also determined and are set forth in Table 3, along with the data for Example 5. The data demonstrate that as the heating temperature increases, the peak widths in the diffraction patterns become narrower, indicating increased crystallinity. All peaks can be understood based on the O3 crystal structure.

Electrochemical cells were constructed using material from Examples 10 and 12 as the cathode, as cycled as described above. The reversible and irreversible capacities are also reported in Table 3, along with data for Example 5. All samples performed well.

TABLE 3

Example	y	HTT (°C)	a (Å)	c (Å)	Rev. Capacity mAh/g 3.0-4.4V	Irrev. Capacity mAh/g 3.0-4.4V	Rev. Capacity mAh/g 2.0-4.8V	Irrev. Capacity mAh/g 2.0-4.8V
10	0.333	600	2.8800	14.2389	110	50	210	65
11	0.333	700	2.8761	14.2569	*	*	*	*
12	0.333	800	2.8714	14.2644	120	20	230	50
5	0.333	900	2.8697	14.2654	160	10	230	15

“HTT” refers to the heat treatment temperature. “a” and “c” represent lattice parameters. An asterisk means “not tested.”

5

Examples 13-15

Examples 13-15 were prepared following the procedure described for Examples 1-6 where $y = 0.416$ except that the samples were heated at 600°C (Example 13), 700°C (Example 14), and 800°C (Example 15), rather than 900°C. The lattice parameters were determined for each sample and are set forth in Table 4, along with the data for Example 1 ($y = 0.416$, 900°C). These samples also exhibited the O3 crystal structure.

10

TABLE 4

Example	y	HTT (°C)	a (Å)	c (Å)
13	0.416	600	2.8829	14.2609
14	0.416	700	2.8824	14.2720
15	0.416	800	2.8824	14.2808
1	0.416	900	2.8793	14.2781

15

“HTT” refers to the heat treatment temperature. “a” and “c” represent lattice parameters.

Examples 16-18

Examples 16-18 were prepared following the procedure described for Examples 1-6 where $y = 0.5$ except that the samples were heated at 600°C (Example 16), 700°C

(Example 17), and 800°C (Example 18), rather than 900°C. X-ray diffraction patterns for each sample were collected and are shown in Fig. 6, along with an x-ray diffraction pattern for Example 6 prepared at 900°C. The lattice parameters were also determined and are set forth in Table 5, along with the data for Example 6. The data demonstrate that as the heating temperature increases, the peak widths in the diffraction patterns become narrower, indicating increased crystallinity. All peaks can be understood based on the O3 crystal structure.

Electrochemical cells were constructed using material from Examples 16-18 as the cathode, as cycled as described above. The reversible and irreversible capacities are also reported in Table 5, along with data for Example 6. In addition, Fig. 7 reports voltage versus capacity and capacity versus cycle number for each cell, as well as a cell constructed using Example 6, when cycled between 4.4 V and 3.0 V. Fig. 8 reports voltage versus capacity and capacity versus cycle number for each cell, as well as a cell constructed using Example 6, when cycled between 4.8 V and 2.0 V. All samples performed well, with samples prepared at higher temperatures exhibiting the best capacity retention and lowest irreversible capacity.

TABLE 5

Example	y	HTT (°C)	a (Å)	c (Å)	Rev. Capacity mAh/g 3.0-4.4V	Irrev. Capacity mAh/g 3.0-4.4V	Rev. Capacity mAh/g 2.0-4.8V	Irrev. Capacity mAh/g 2.0-4.8V
16	0.5	600	2.8926	14.298	120	60	200	50
17	0.5	700	2.8914	14.2842	140	20	210	25
18	0.5	800	2.8889	14.2812	145	15	210	20
6	0.5	900	2.8899	14.2964	140	10	200	25

“HTT” refers to the heat treatment temperature. “a” and “c” represent lattice parameters.

Examples 19-20

Example 19 describes the preparation of 0.1 mole of $\text{Li}[\text{Ni}_y\text{Co}_{1-2y}\text{Mn}_y]\text{O}_2$ where $y = 0.375$. The procedure described in Examples 1-6 was followed except that the following reactants were used: 10.918 g of $\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$, 9.420 g of $\text{Mn}(\text{NO}_3)_2 \cdot 4\text{H}_2\text{O}$, and 7.280 g of $\text{Co}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$. In addition, the dried transition metal hydroxide was mixed with 4.195 g of $\text{LiOH} \cdot \text{H}_2\text{O}$. The lattice parameters were measured and determined to be: $a = 2.870 \text{ \AA}$ and $c = 14.263 \text{ \AA}$. Elemental analysis of the material revealed that the composition had the following stoichiometry: $\text{Li}_{1.04}[\text{Ni}_{0.368}\text{Co}_{0.263}\text{Mn}_{0.38}]\text{O}_2$, which is in close agreement with the target stoichiometry of $\text{Li}[\text{Ni}_{0.375}\text{Co}_{0.25}\text{Mn}_{0.375}]\text{O}_2$.

Example 20 was prepared in similar fashion except that the relative amounts of ingredients were adjusted to yield $y = 0.25$. The lattice parameters were measured and determined to be: $a = 2.8508$ and $c = 14.206 \text{ \AA}$. Elemental analysis of the material revealed that the composition had the following stoichiometry: $\text{Li}_{1.03}[\text{Ni}_{0.243}\text{Co}_{0.517}\text{Mn}_{0.25}]\text{O}_2$, which is in close agreement with the target stoichiometry of $\text{Li}[\text{Ni}_{0.25}\text{Co}_{0.5}\text{Mn}_{0.25}]\text{O}_2$.

Electrochemical cells were constructed using material from Examples 19-20 as the cathode, as cycled as described above. Fig. 9 reports voltage versus capacity for each cell when cycled between 2.5 V and 4.8 V. Both samples performed well.

A second set of electrochemical cells was constructed using material from Examples 19-20 and cycled as described above between 2.5 V and 4.4 V using a current of 40 mA/g. The results are shown in Figs. 10 and 11. In the case of Example 19 (Fig. 10), data was collected at both 30°C and 55°C, whereas in the case of Example 20 (Fig. 11) data was collected at 30°C only. Both samples performed well.

The cathode material from Example 19 was further analyzed using differential scanning calorimetry (DSC). The sample cell was a 3.14 mm outer diameter, type 304 stainless steel seamless tube having a wall thickness of 0.015 mm that had been cut into an 8.8 mm long piece (MicroGroup, Medway, MA). The cell was cleaned, after which one end was flattened. The flattened end was then welded shut by tungsten inert gas welding using a Miller Maxstar 91 ARC welder equipped with a Snap Start II high frequency ARC starter.

Once the flattened end had been sealed, the tube was loaded in an argon-filled glove box with 2 mg of the cathode material from Example 19 taken from a 2325 coin cell

that had been charged to 4.2 V using the procedure described above. The electrolyte was not removed from the cathode sample. After the sample was loaded, the tube was crimped and welded shut.

The DSC measurements were performed using a TA Instruments DSC 910 instrument. The DSC sweep rate was 2°C/minute. Both the onset temperature and the total heat evolved were recorded. The onset temperature corresponds to the temperature at which the first major exothermic peak occurs. The results are shown in Table 6. For the sake of comparison, data from cathodes prepared using LiNiO₂ and LiCoO₂ is included as well. The results demonstrate that cathodes prepared using the material from Example 19 exhibited a higher onset temperature and evolved less heat than cathodes prepared using LiNiO₂ and LiCoO₂.

TABLE 6

Material	Onset Temperature (°C)	Total Heat (J/g)
Example 19	290	404
LiNiO ₂	180	1369
LiCoO ₂	185	701

A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention. Accordingly, other embodiments are within the scope of the following claims.

What is claimed is:

1. A cathode composition for a lithium-ion battery having the formula $\text{Li}[\text{M}^1_{(1-x)}\text{Mn}_x]\text{O}_2$ where $0 < x < 1$ and M^1 represents one or more metal elements, with the proviso that M^1 is a metal element other than chromium,
 5 said composition characterized as being in the form of a single phase having an O3 crystal structure that does not undergo a phase transformation to a spinel crystal structure when incorporated in a lithium-ion battery and cycled for 100 full charge-discharge cycles at 30°C and a final capacity of 130 mAh/g using a discharge current of 30 mA/g.
- 10 2. A cathode composition according to claim 1 wherein M^1 is selected from the group consisting of Ni, Co, Fe, Cu, Li, Zn, V, and combinations thereof.
3. A cathode composition according to claim 1 wherein $x = (2-y)/3$ and $\text{M}^1_{(1-x)}$ has the formula $\text{Li}_{(1-2y)/3}\text{M}^2_y$, where $0 < y < 0.5$ and M^2 represents one or more metal elements, with
 15 the proviso that M^2 is a metal element other than chromium,
 said cathode composition having the formula $\text{Li}[\text{Li}_{(1-2y)/3}\text{M}^2_y\text{Mn}_{(2-y)/3}]\text{O}_2$.
4. A cathode composition according to claim 1 wherein $x = (2-2y)/3$ and $\text{M}^1_{(1-x)}$ has the formula $\text{Li}_{(1-y)/3}\text{M}^3_y$, where $0 < y < 0.5$ and M^3 represents one or more metal elements, with
 20 the proviso that M^3 is a metal element other than chromium,
 said cathode composition having the formula $\text{Li}[\text{Li}_{(1-y)/3}\text{M}^3_y\text{Mn}_{(2-2y)/3}]\text{O}_2$.
5. A cathode composition according to claim 1 wherein $x = y$ and $\text{M}^1_{(1-x)}$ has the formula $\text{M}^4_y\text{M}^5_{1-2y}$, where $0 < y < 0.5$, M^4 is a metal element other than chromium, and M^5 is a
 25 metal element other than chromium that is different from M^4 ,
 said cathode composition having the formula $\text{Li}[\text{M}^4_y\text{M}^5_{1-2y}\text{Mn}_y]\text{O}_2$.
6. A cathode composition according to claim 3, 4, or 5 wherein $0.083 < y < 0.5$.
- 30 7. A cathode composition according to claim 3, 4, or 5 wherein $0.167 < y < 0.5$.
8. A cathode composition according to claim 3 wherein M^2 is Ni.

9. A cathode composition according to claim 4 wherein M^3 is Co.
10. A cathode composition according to claim 5 wherein M^4 is Ni and M^5 is Co.


5

11. A lithium-ion battery comprising:


- (a) an anode;
- (b) a cathode comprising a composition according to claim 1; and
- (c) an electrolyte separating said anode and said cathode.


10

1/13

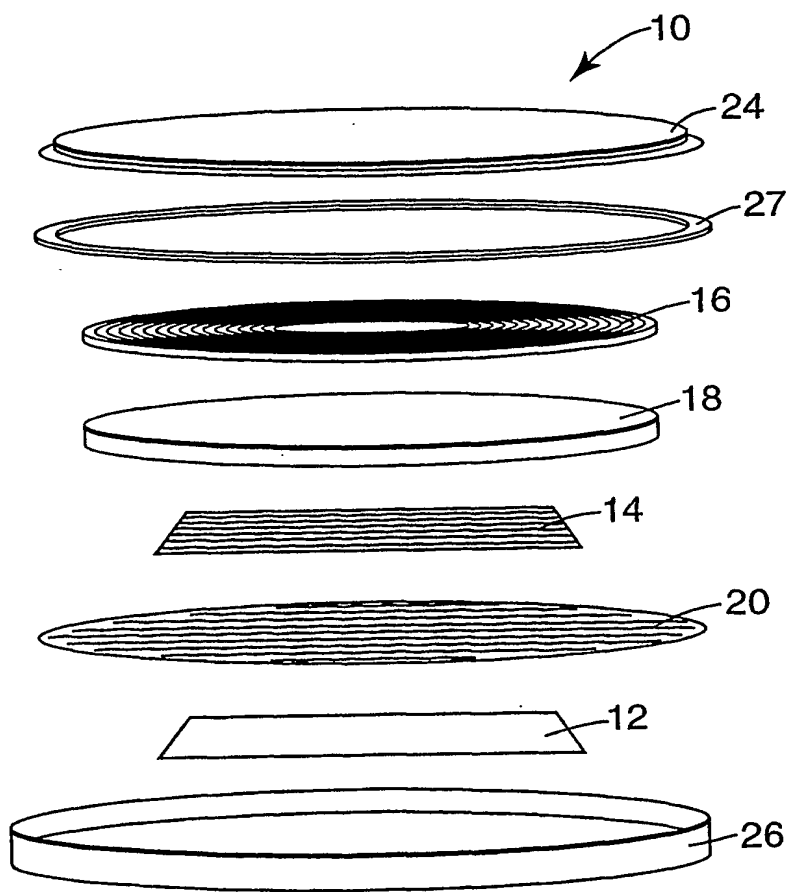
**Fig. 1**

2/13

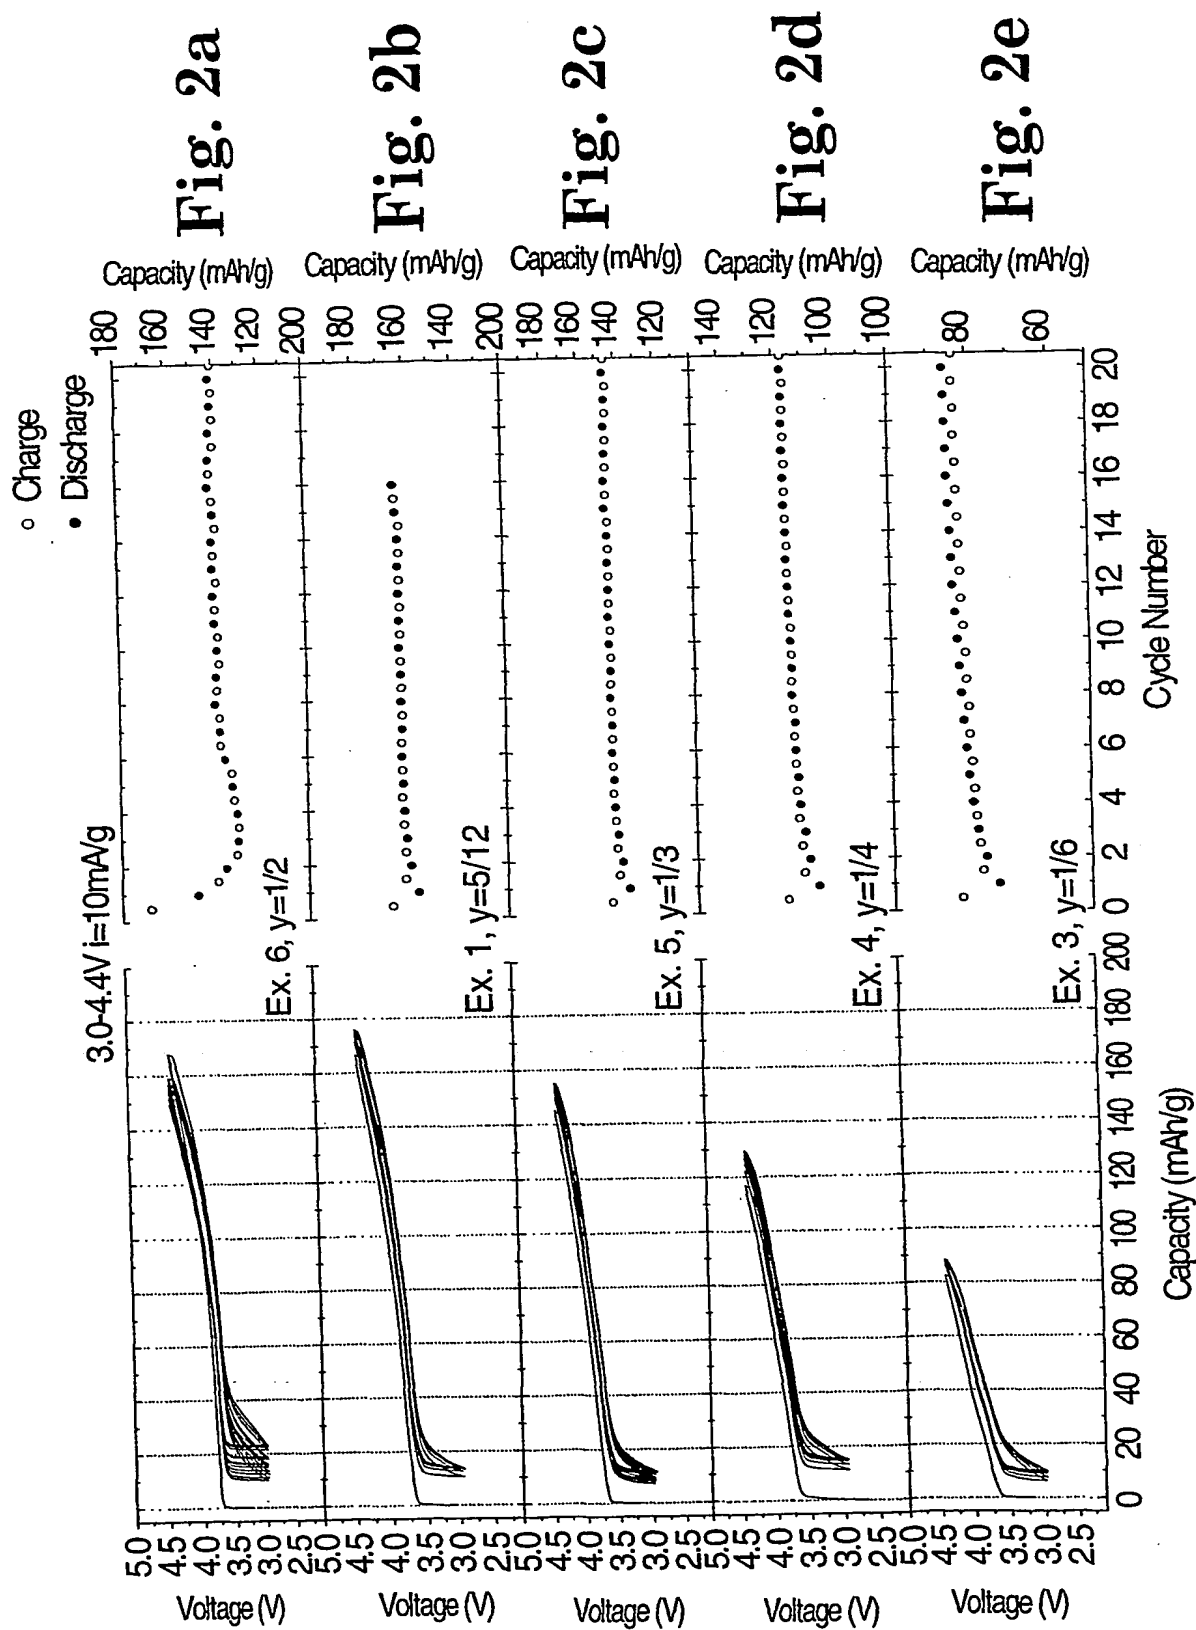


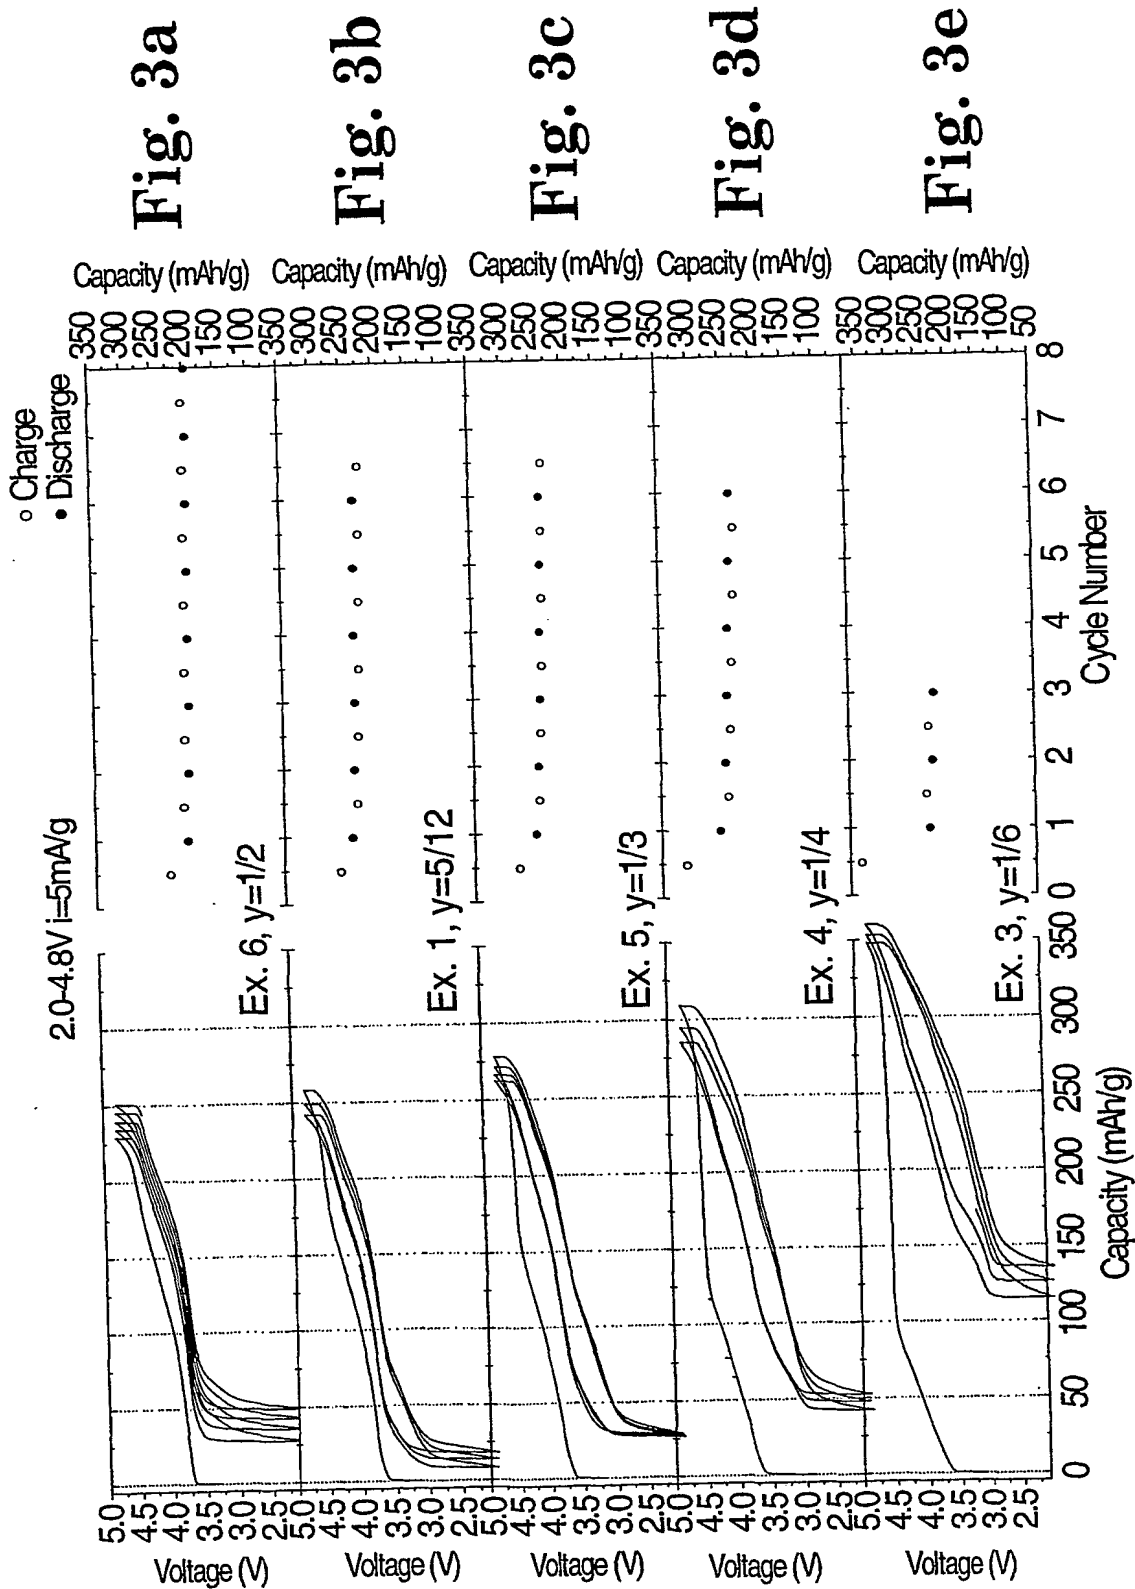


4/13

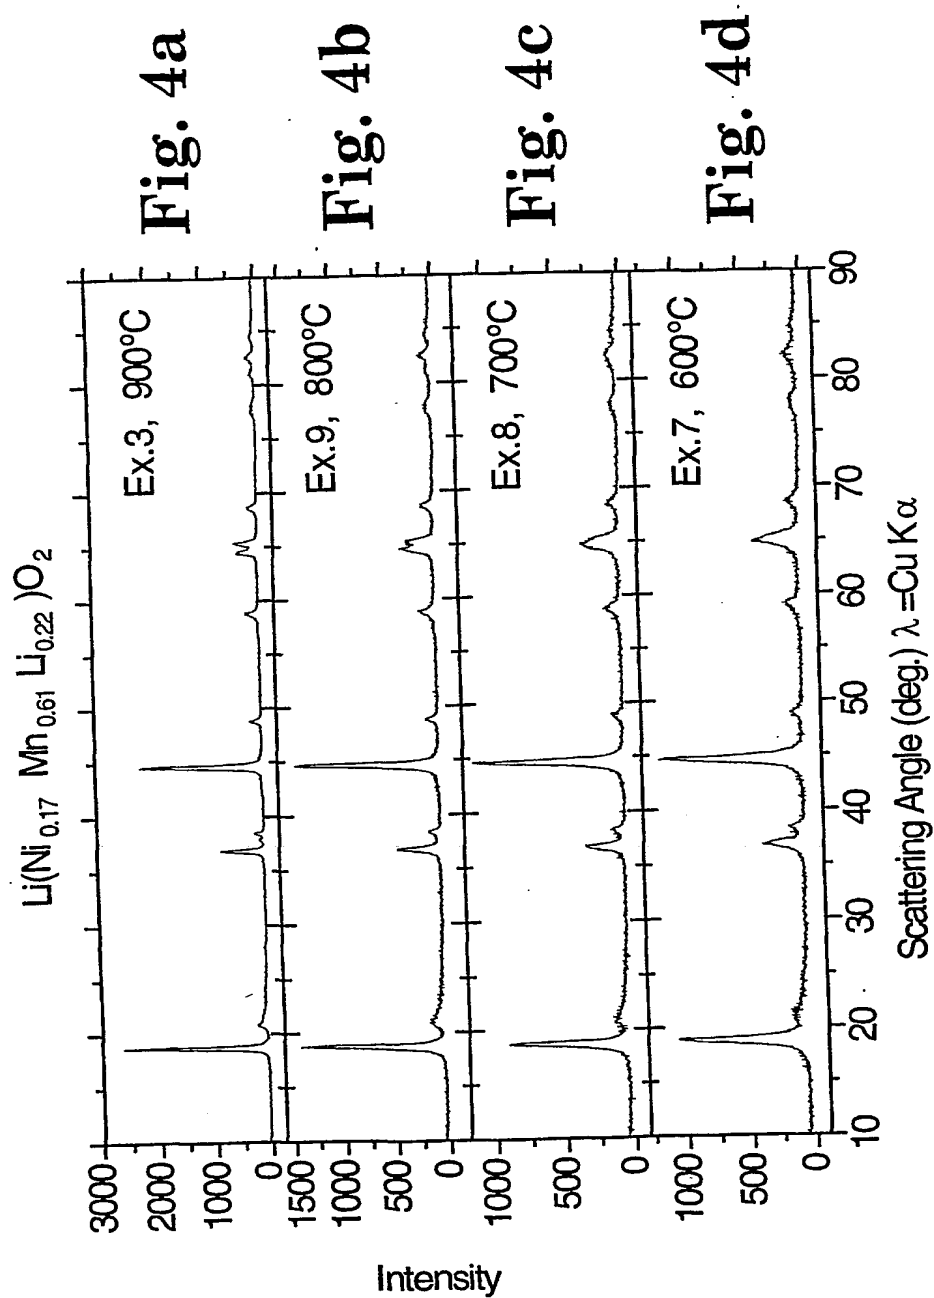


5/13

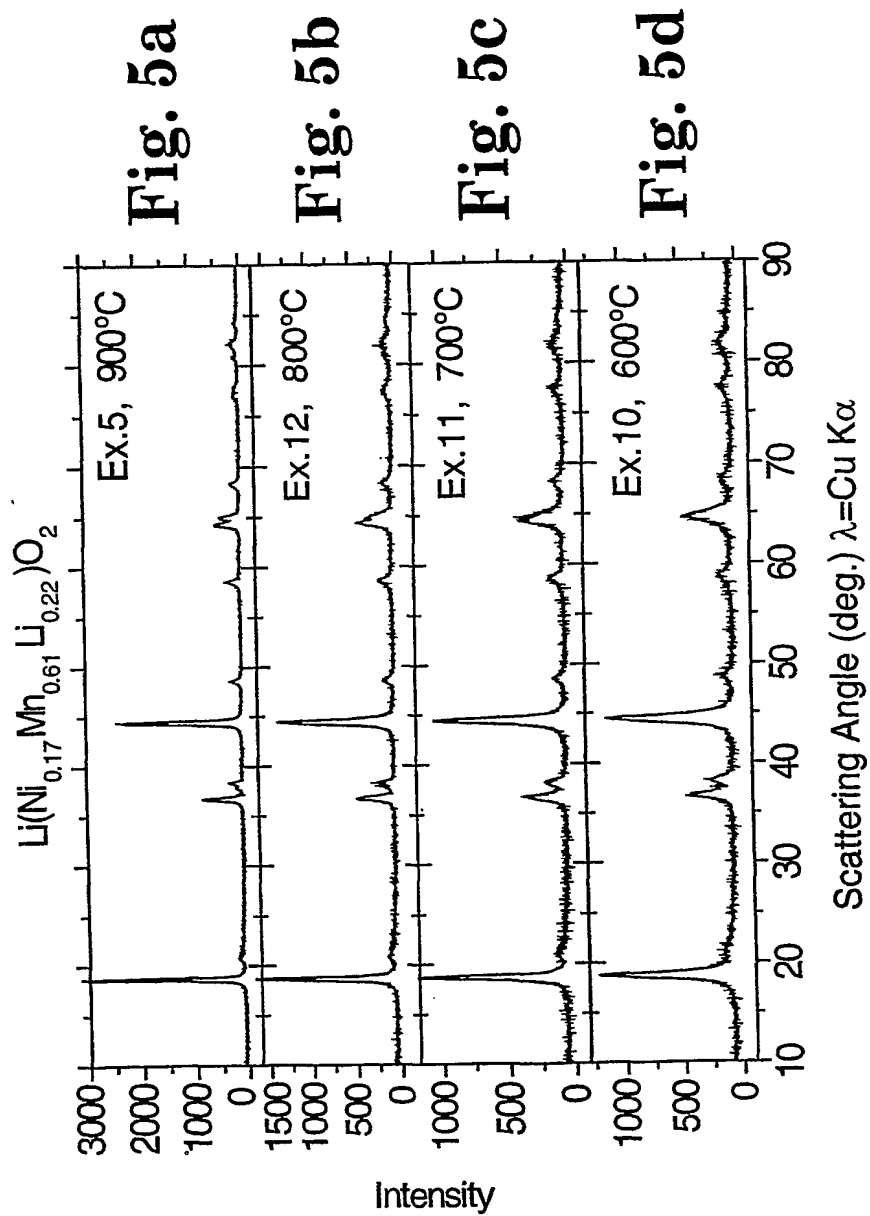


6/13

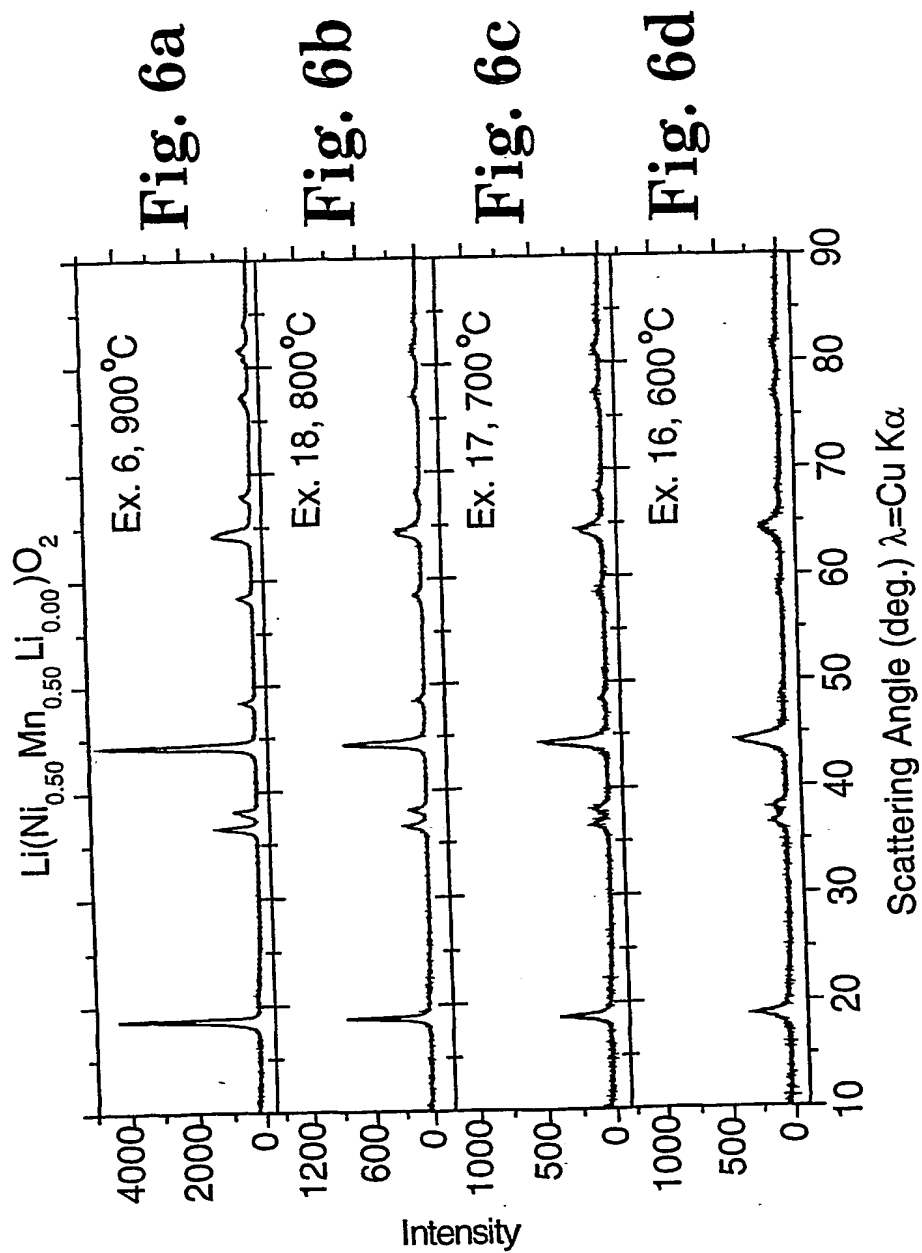

7/13

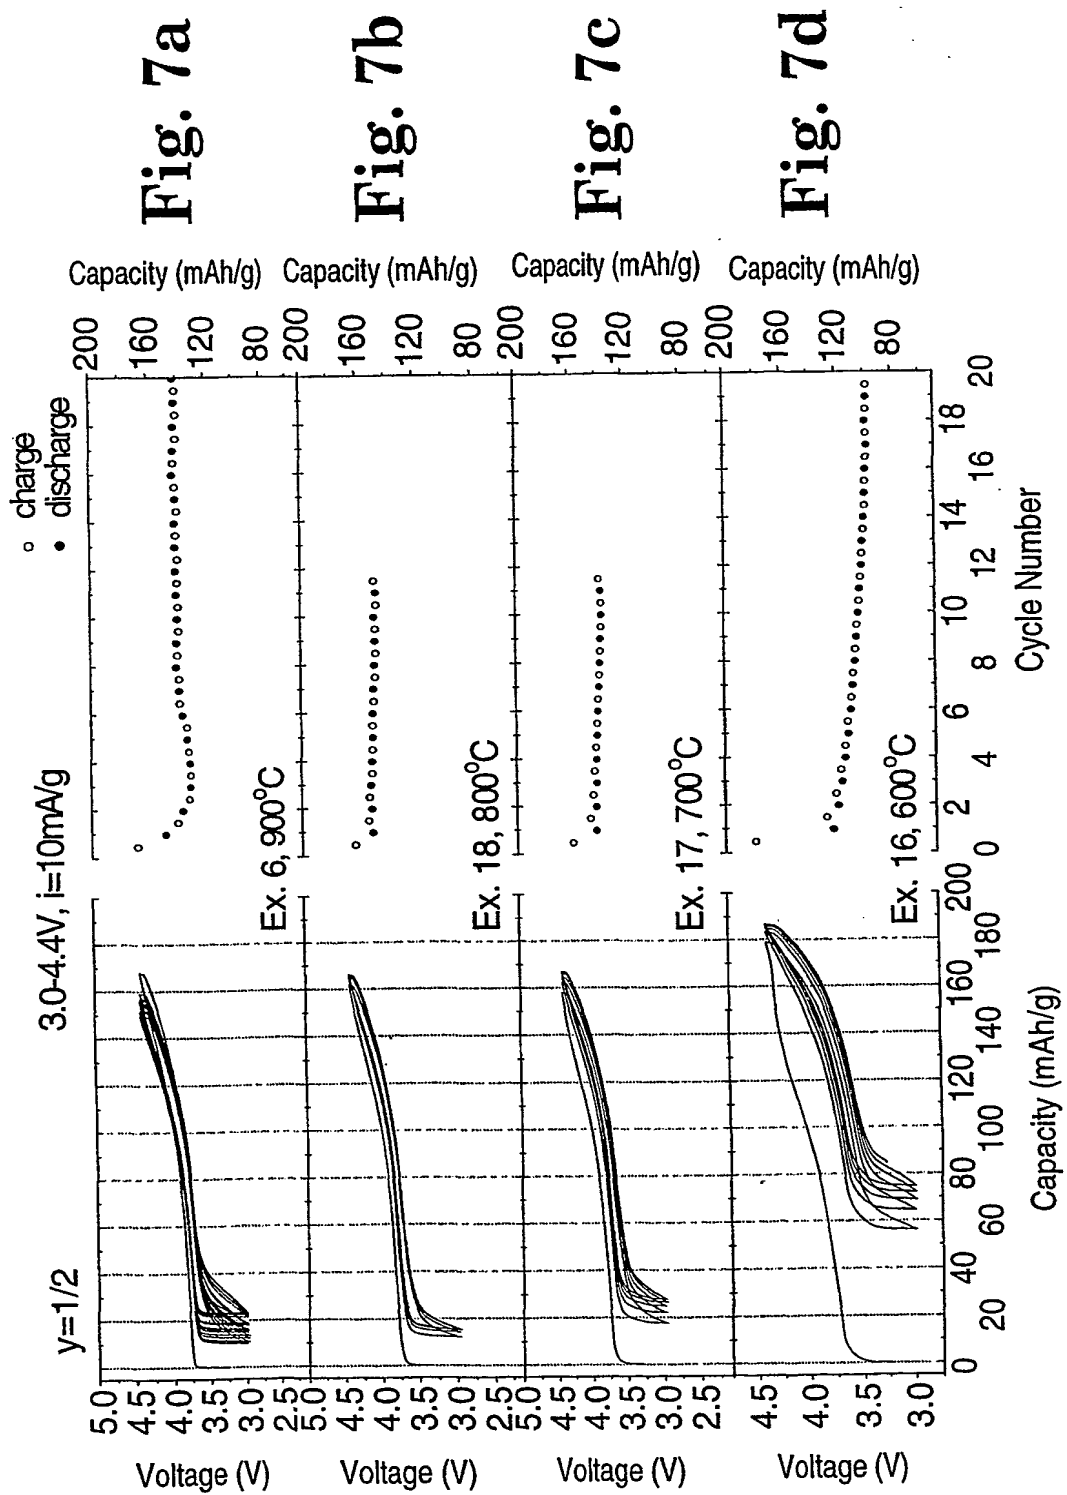


8/13

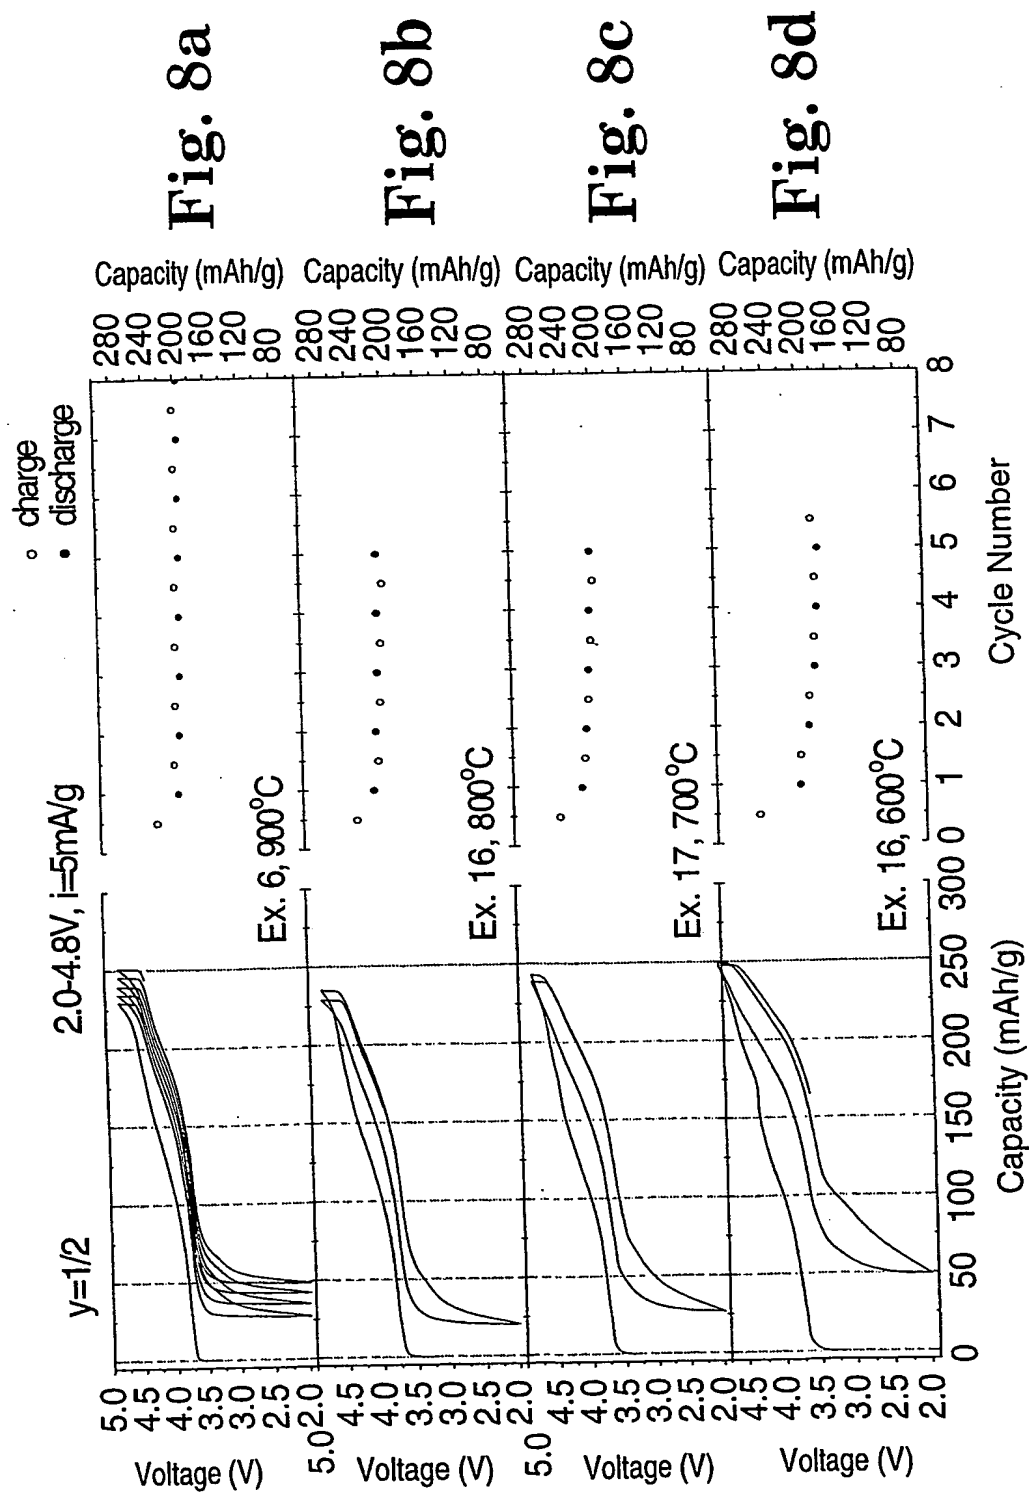

9/13

Fig. 9a

Fig. 9b

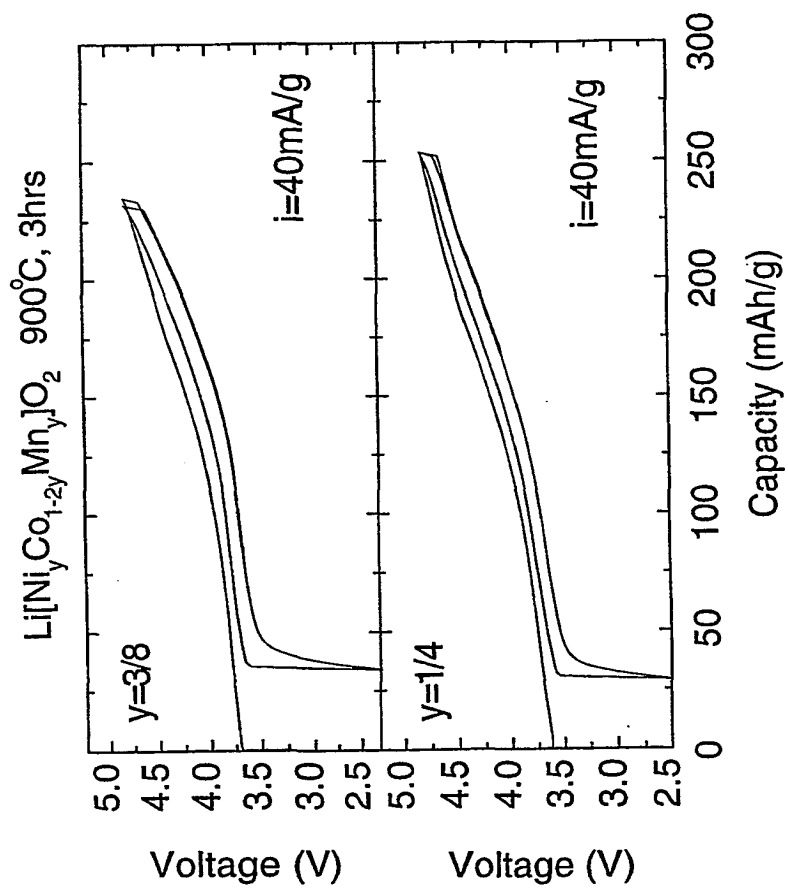

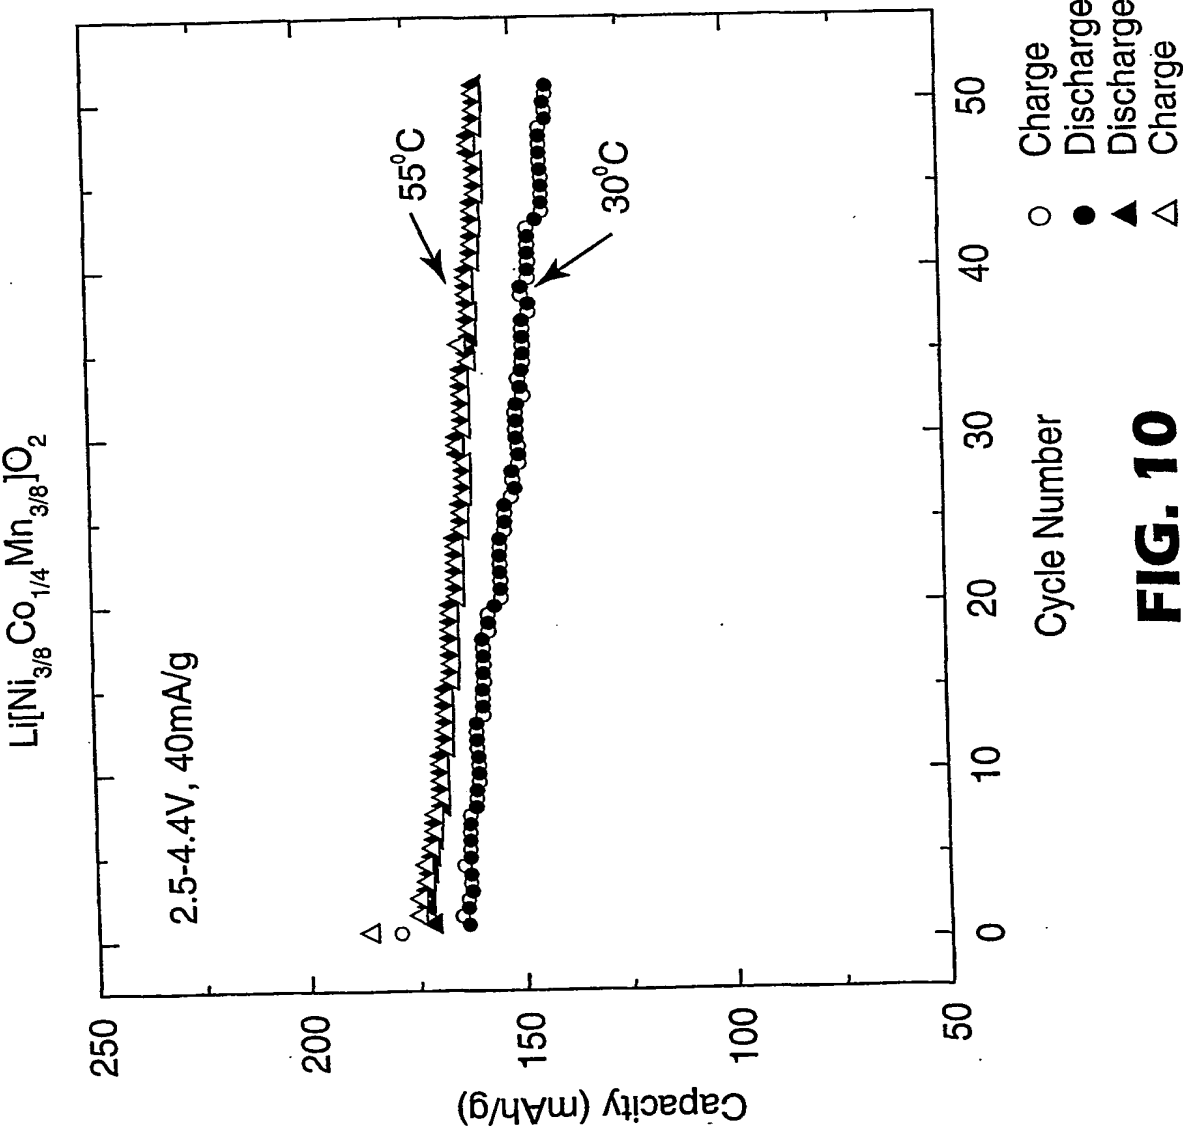


FIG. 10

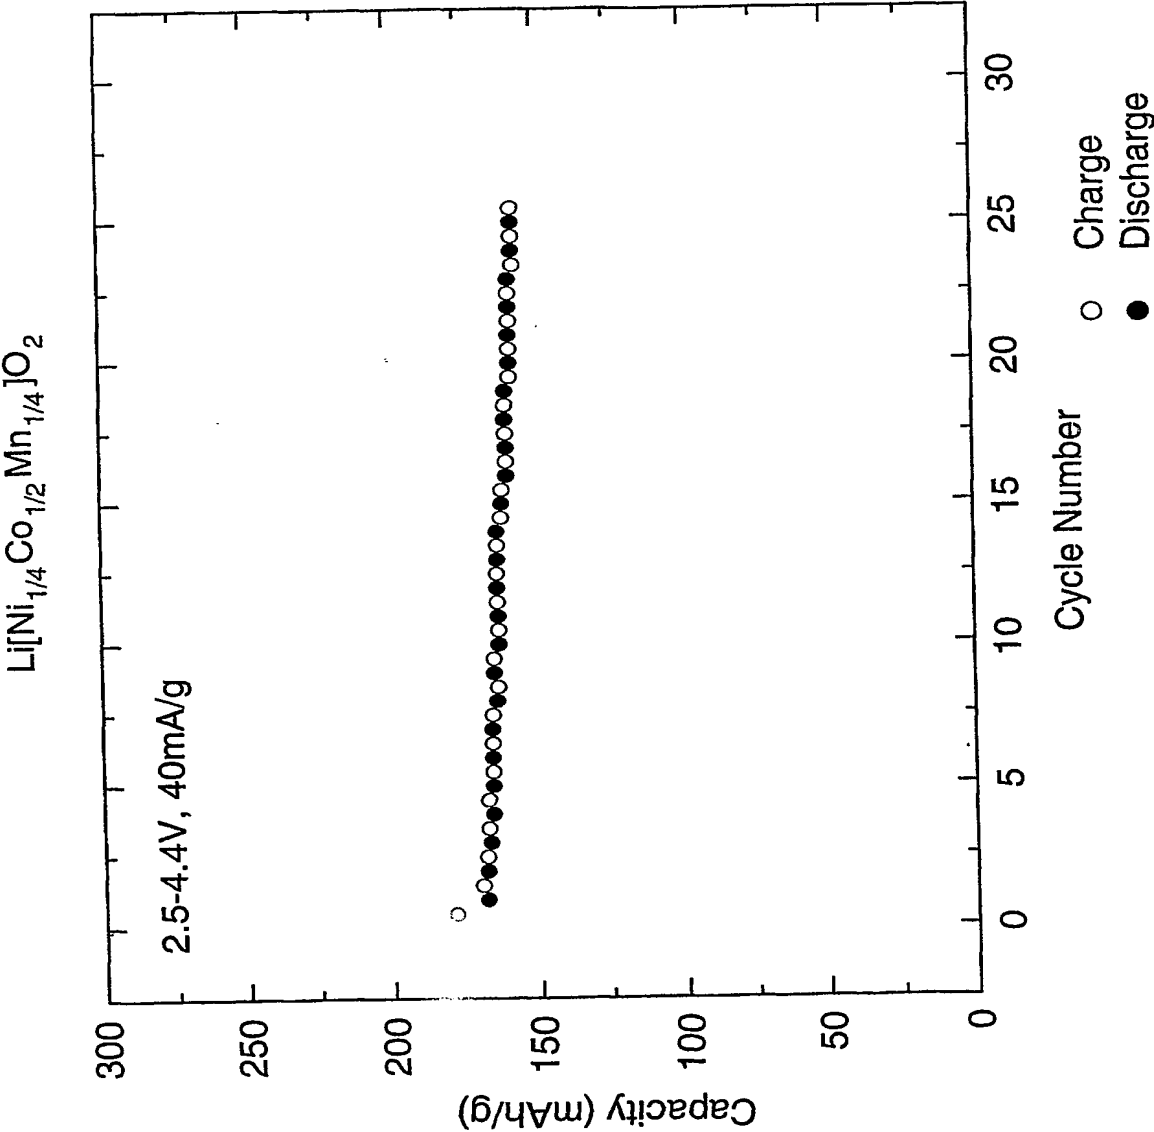
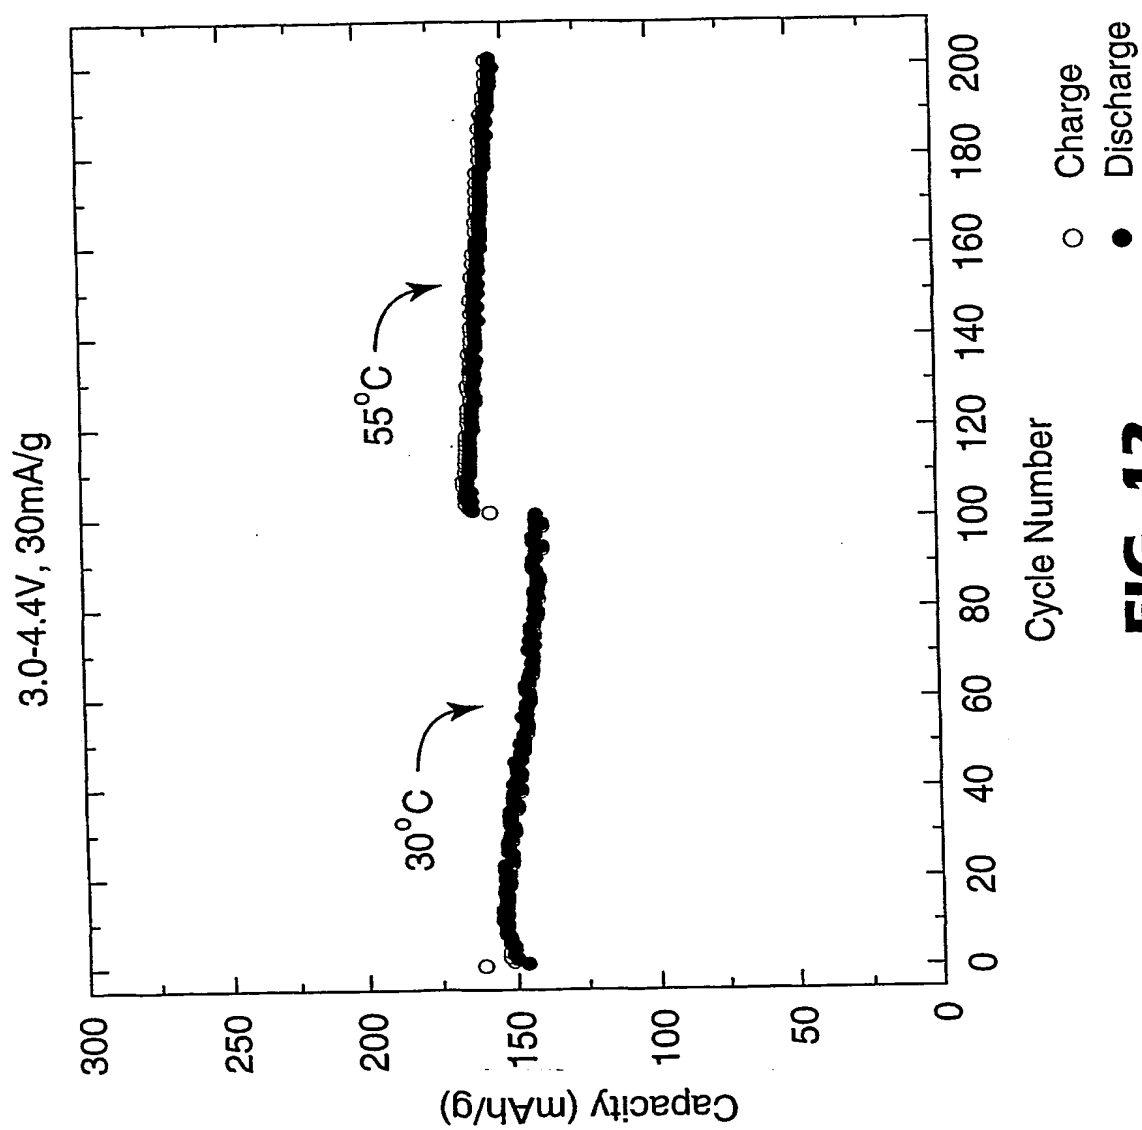
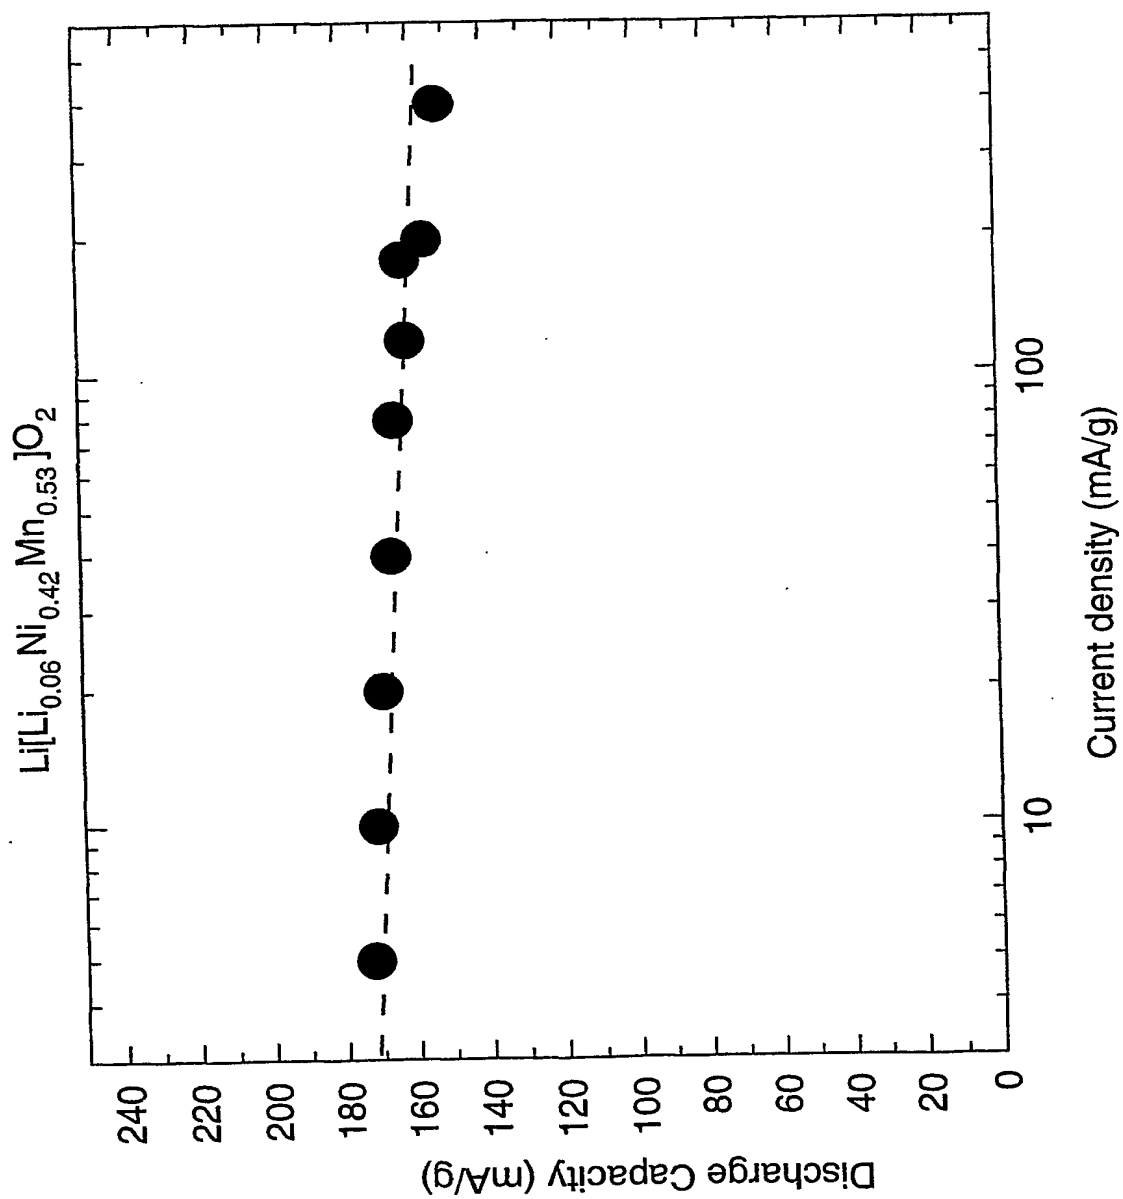


FIG. 11

12/13

**FIG. 12**

13/13

**FIG. 13**

INTERNATIONAL SEARCH REPORT

Intern Application No
PCT/US 02/07251

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01M4/50 H01M4/48 H01M10/40

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 26683 A (UNIV ST ANDREWS ;ARMSTRONG ANTHONY ROBERT (GB); BRUCE PETER GEORGE) 24 July 1997 (1997-07-24)	1-7, 11
Y	page 2, line 16 -page 6, line 27 page 9, line 16 -page 10, line 23	8-10
X	EP 0 813 256 A (JAPAN STORAGE BATTERY CO LTD) 17 December 1997 (1997-12-17)	1-11
Y	column 4, line 6 -column 6, line 18	8-10
Y	column 3, line 12 -column 4, line 19	1
Y	US 6 168 887 B1 (DAHN JEFFREY R ET AL) 2 January 2001 (2001-01-02) column 1, line 38 -column 2, line 21 column 5, line 53 -column 6, line 57; figure 2A	1
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

4 July 2002

Date of mailing of the international search report

12/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Thanos, I

INTERNATIONAL SEARCH REPORT

Intern Application No
PCT/US 02/07251

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 858 324 A (ZHENG TAO ET AL) 12 January 1999 (1999-01-12) column 3, line 38 -column 7, line 53 ---	1,11
A	EP 0 944 125 A (SANYO ELECTRIC CO) 22 September 1999 (1999-09-22) page 2, line 2 -page 3, line 6; examples 1-14 ---	1-11
A	US 6 030 726 A (HONBO HIDETOSHI ET AL) 29 February 2000 (2000-02-29) column 7, line 16 -column 8, line 65 ---	1,11
A	US 5 783 332 A (FUJITA YUKO ET AL) 21 July 1998 (1998-07-21) column 3, line 1 -column 6, line 67 -----	1,11

INTERNATIONAL SEARCH REPORT

 Interr
 Application No
 PCT/US 02/07251

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9726683	A	24-07-1997	AU 713144 B2	25-11-1999
			AU 1387597 A	11-08-1997
			CA 2242901 A1	24-07-1997
			EP 0875080 A1	04-11-1998
			WO 9726683 A1	24-07-1997
			JP 2000503453 T	21-03-2000
			US 6214493 B1	10-04-2001
EP 0813256	A	17-12-1997	JP 10003921 A	06-01-1998
			CN 1171638 A	28-01-1998
			DE 69712409 D1	13-06-2002
			EP 0813256 A2	17-12-1997
			US 5981106 A	09-11-1999
US 6168887	B1	02-01-2001	NONE	
US 5858324	A	12-01-1999	AU 6462098 A	11-11-1998
			JP 2001520617 T	30-10-2001
			WO 9846528 A1	22-10-1998
EP 0944125	A	22-09-1999	JP 11273677 A	08-10-1999
			EP 0944125 A1	22-09-1999
			US 6333128 B1	25-12-2001
US 6030726	A	29-02-2000	JP 3188395 B2	16-07-2001
			JP 10003907 A	06-01-1998
			JP 10321225 A	04-12-1998
			CN 1170243 A , B	14-01-1998
US 5783332	A	21-07-1998	JP 8298115 A	12-11-1996
			CN 1148738 A	30-04-1997
			DE 19615800 A1	05-12-1996
			FR 2733632 A1	31-10-1996
			US 5738957 A	14-04-1998
			US 5759717 A	02-06-1998
			US 5677087 A	14-10-1997

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)